Stenhøj Mascot 1.30 F & CF

Mascot 1.30 is a single motor, 2-post electro-mechanical lift with base frame with integrated drive-over ramps.

Stenhøj Mascot 1.30 F & CF are equipped with system against nut breakage, internal arm locking system that is automatically released in bottom position; as well as chain breakage system.

Mascot 1.30 F & CF have lifting capacities of 3 t and are equipped with flex pads or combi flex pads.

We offer a wide variety of flex and U-pads as optional extras.

The lift is as standard without rubber post covers.

The Mascot 1.30 F & CF control unit is with impulse system.

Mascot 1.30 CF has adjustable combiflex pads – adjustable from 145 to 310 mm.
We offer a variety of extra flex and U-pads for this lift type.

STENHØJ
lifting the level

Stenhøj Mascot 1.30 F & CF

General technical specifications
Stenhøj lifts are developed, manufactured and type tested in accordance with standard EN1493:2010 and the Machinery Directive 2006/42/EC. The lifts are tested for overloading with loads of 1.5 times the maximum capacity and long-term tested following a pattern of operation varying from 50 % of the lifts' capacity up to 115 % of their capacity (corresponding to 10 years' intensive workshop operation with 6 – 7 lifts per day). Approving bodies: The Danish Technological Institute, TÜV, Bureau Veritas etc.

General surface-technological data:
Stenhøj lifts are shot-blasted, de-greased, phosphate treated and powder coated. The result is a robust industrial surface protected to corrosion class C3* in accordance with EN55633.
*C3 is suitable for environments described as:

Outdoors: Urban and industrial areas with measurable sulphur dioxide pollution. Temperate coastal areas with low salt content in the atmosphere.
Indoors: Buildings for production with high atmospheric humidity and low air pollution such as food manufacturers, laundries, breweries etc.

Technical data	Mascot 1.30 F	Mascot 1.30 CF
Lifting capacity	3000 kg	3000 kg
Lifting/lowering time	55 sec.	55 sec.
Lifting height	2005-2035mm	2045-2210 mm
Min. Height	105 mm	145 mm
Motor	1 x 2.8 kW	1 x 2.8 kW
Min./max. arm length	540/850 mm 900/1425 mm	580/885 mm 930/1425 mm

Model	A	B	C	D	E	F	G	H*	H1*	I	J	K	L	M	N	O	P	Q	R	S	T
F	3106	2372	2912	2990	2735	50	1900	2005	2035	2112	1340	837	540	850	900	1425	130	135	105		
CF	3106	2372	2912	2990	2735	50	1900	2045	2210	2112	1340	837	580	885	930	1425	130	310	145	25	275

* with standard pads!



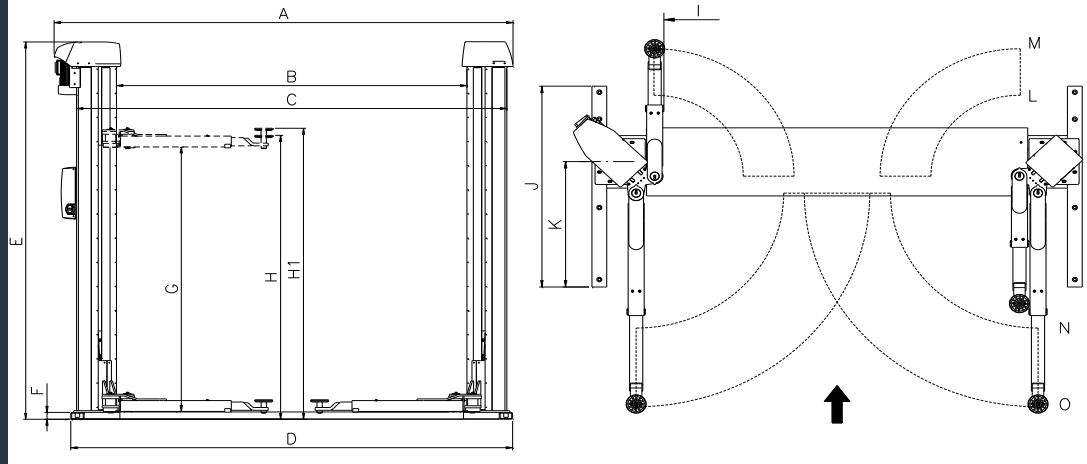

STENHØJ
lifting the level

Stenhøj A/S
Denmark

Tel: +45 76 82 13 30
Fax: +45 76 82 13 31
Mail: info@stenhoj.dk
Web: www.stenhoj.dk

Standard colours

Red RAL 3013
White RAL 9002

No liability accepted for specifications, which are subject to alteration.