

Application

- Check-in
- Repair and maintenance
- Wheel alignment

Approvals

- Renault
- MS 45 S-45 & MS 45 WL-45:
Volvo



MagiX 45

Electro-hydraulic scissor lift with platforms, 4.5 t capacity

Description:

Upper plates:

- Double master / slave system
- Control stand with integrated pump unit and alarm signal
- Electronic synchronization
- Emergency lowering valve

Scissors:

- Sturdy scissor construction
- No mechanical connection between scissor sections
- Optimum access to vehicle
- Low minimum height


Standard colours

- Upper plates & scissor: Grey RAL 7016
- Ramps: Red RAL 3020

Technical data	
Lifting capacity	4,500 kg
Lifting height	1,680 mm
Working height	1,900 mm
Lifting / lowering time	55 Sec.
Pump unit	4.0 kW
Voltage	3x230/400V - 50 Hz

Free-wheel device	
Lifting capacity	4,000 kg
Lifting height	400 mm
Drive-on height	0 mm
Lifting / lowering time	7/15 Sec.
Operation	hydraulic
Necessary air pressure min. / max.	6 bar
Length	1,450 - 1.965 mm

Scissor platforms	
Platform length	4,500/4,800/5,200 mm
Platform width	660 mm
Distance between platforms	800 - 1,000 mm
Drive-on height	220 mm
Depth of recess	0 mm

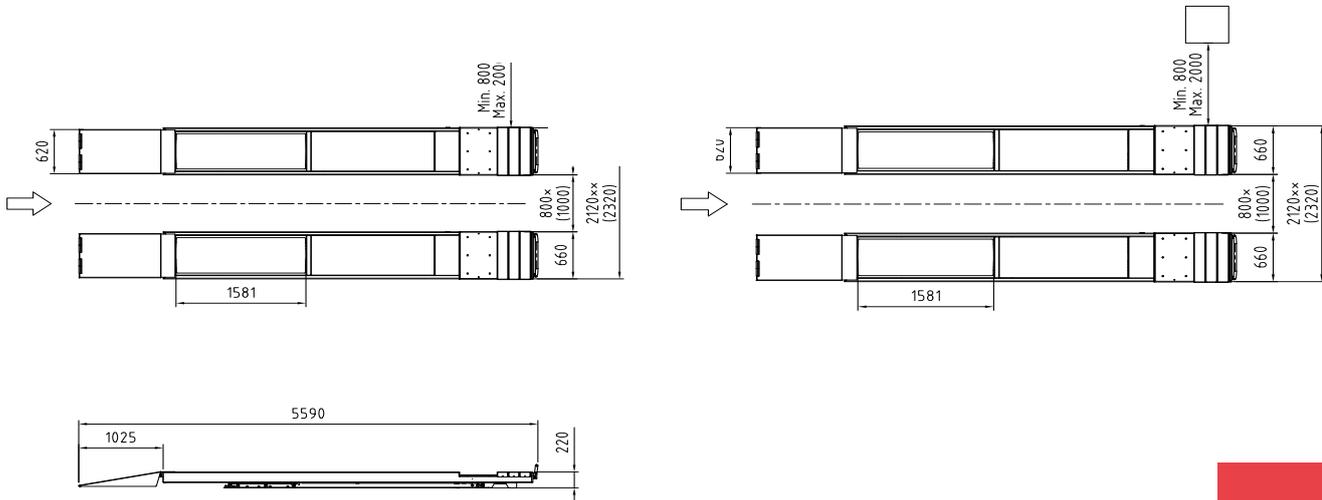

Scan the QR-Code for detailed product information.

Further Information on www.autopstenhoj.com

Versions:

- Available with different Voltage
- We recommend surface-mounting as the lifting height would otherwise be very low

Installation:

- S = flush platforms, incl. guiding edges for scissor jack
- WL = with front recesses for turn tables and rear side slip plates, incl. guiding edges for scissor jack
- Combi = platforms with integrated Free-wheel device
- Also available with galvanized base frame and platforms
- 45 = 4,500 mm platforms

- 48 = 4,800 mm platforms
- 52 = 5,200 mm platforms
- Incl. drive-on ramps, stops and LED lighting set

Optional extras:

- Set of expansion bolts
- Set rubber blocks, 40, 60, 70, 80 and 100 mm
- Guiding edges for scissor jack for Combi-versions
- Play detector

Special colours available on request!