

**Application**

- Repair and maintenance



# Maxi 160, 200 & 240

Electro-mechanical 4-post lifts, 16, 20 & 24 t capacity

## Description:


- Obstruction system
- Each post equipped with a motor and elastic coupling
- Self-carrying spindles with carrying and safety nuts
- Pushbutton control unit with alarm signal
- One movable platform as standard

## Standard colours

- Platforms & posts: Grey RAL 7016
- Ramps: Red RAL 3020

Technical data	
Lifting capacity	16,000 / 20,000 / 24,000 kg
Lifting height	1,850 mm
Stroke length	1,545 / 1,555 mm
Lifting / lowering time	120 Sek.
Motor	4 x 2.2 / 6 x 2.2 kW
Operation	mechanical
Voltage	3x230/400V-50 Hz - 35/45 A / 3x230/400V-50 Hz - 25/16 A 3x230/400V-50 Hz - 45/60 A

Technical data	
Min. height	176 mm
Drive-through width	3,200 / 3,470 mm
Width between posts	3,200 / 3,470 mm
Total width	3,920 / 4,190
Total height	2,550 mm
Total length	9,005 / 9,745 / 11,505 / 12,395 mm
Platform length	5,000/7,500/8,000/8,500/9,000 mm
Utilization area of platform	variabel
Platform width	700 mm
Distance between platforms	950 / 1,180 mm
Wheel base	variabel

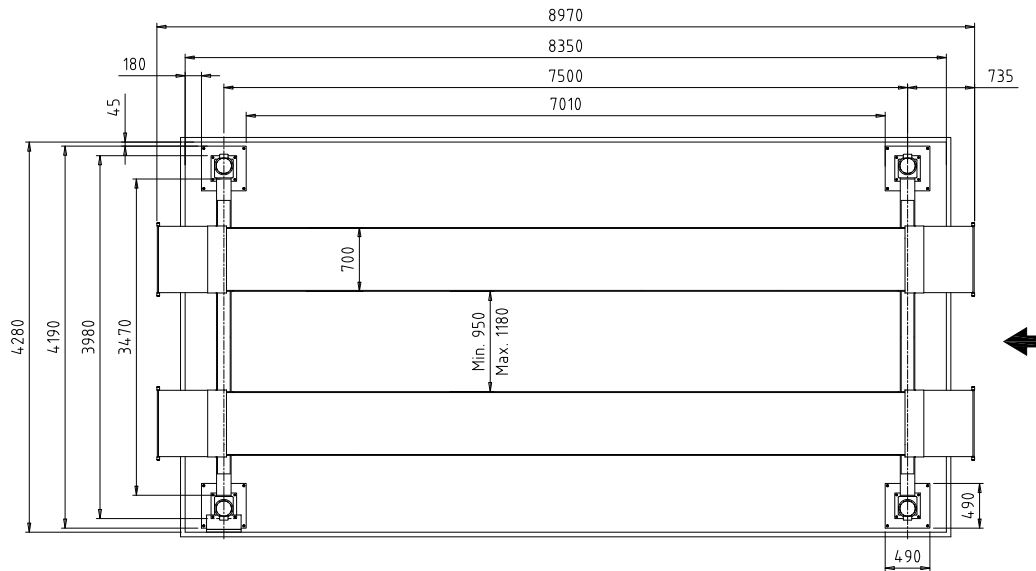

Scan the QR-Code for detailed product information.

Further Information on [www.autopstenhoj.com](http://www.autopstenhoj.com)

### Versions:

- Maxi 160 & 200:
  - 3,950 mm flush platforms
  - 7,500 mm flush platforms
  - 8,000 mm flush platforms
  - 8,500 mm flush platforms
  - 9,000 mm flush platforms
- Maxi 240:
  - 2 x 5,000 mm flush platforms
- 1,260, 2,000 or 2,800 mm Drive-on ramps
- Drive-on ramps and stops for surface-mounting; alternatively drive-over ramps for recessed installation

### Optional extras:

- Set of expansion bolts
- Lighting set
- Scissor jack
- 3rd platform

Special colours available on request!