

Stenhøj Maestro 2.32 + 2.35 Wheel support

Stenhøj Maestro 2.32 + 2.35 wheel support

2-post electro-mechanical lifts

STENHØJ Maestro 2.32 and 2.35 wheel support are electro-mechanical spindle lifts with capacities of 3.2 and 3.5 t respectively.

The lifts are delivered as standard with programmable top stop, which enables you to program the lift to stop in the same working position every time the lift is raised. This ensures an ergonomically correct working position for the mechanics.

STENHØJ Maestro 2.32 and 2.35 wheel support are especially suitable for all types of repair that require free access to the underbody.



Distance between the arms of the wheel support: 500 mm.

As optional extras we offer LED lighting sets.

Nut breakage system.

The most durable nut set on the market.

Cold-rolled, centered spindle for very long life.

6 large guiding wheels.



STENHØJ
lifting the level

Stenhøj Maestro 2.32 + 2.35 Wheel support

General technical specifications

Stenhøj lifts are developed, manufactured and type tested in accordance with standard EN1493:2010 and the Machinery Directive 2006/42/EC. The lifts are tested for overloading with loads of 1.5 times the maximum capacity and long-term tested following a pattern of operation varying from 50 % of the lifts' capacity up to 115 % of their capacity (corresponding to 10 years' intensive workshop operation with 6 - 7 lifts per day). Approving bodies: The Danish Technological Institute, TÜV, Bureau Veritas etc.

General surface-technological data:

Stenhøj lifts are shot-blasted, de-greased, phosphate treated and powder coated. The result is a robust industrial surface protected to corrosion class C3* in accordance with EN55633.


*C3 is suitable for environments described as:

Outdoors: Urban and industrial areas with measurable sulphur dioxide pollution. Temperate coastal areas with low salt content in the atmosphere.

Indoors: Buildings for production with high atmospheric humidity and low air pollution such as food manufacturers, laundries, breweries etc.

Technical data

	Maestro 2.32 wheel support	Maestro 2.35 wheel support
Lifting capacity	3200 kg	3500 kg
Lifting/lowering time	40 sec.	35 sec.
Lifting height	1910 mm	1910 mm
Motor	2 x 1.5 kW	2 x 2.8 kW

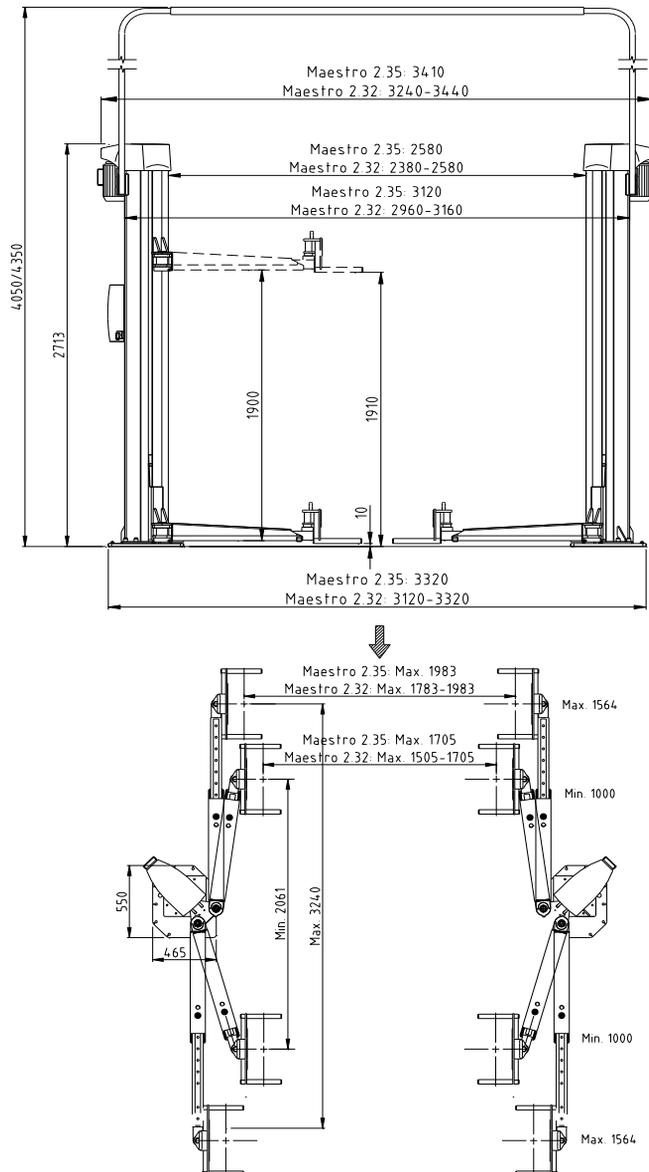

STENHØJ
lifting the level

Stenhøj A/S
Denmark

Tel: +45 76 82 13 30
Fax: +45 76 82 13 31
Mail: info@stenhoj.dk
Web: www.stenhoj.dk

Standard colours

Red RAL 3013
White RAL 9002
Yellow RAL 1004

No liability accepted for specifications, which are subject to alteration.