



AC Hydraulic^{A/S}
NO COMPROMISE





PRESSES

P60H



Capacity: 60 t
Stroke: 300 mm

Hand hydraulic press for truck workshops and heavy industry

Foot-operated double-acting pneumatically controlled high speed leaving both hands free for quick and precise positioning of item

Traversing ram

With 300 mm stroke for dealing with demanding jobs

Built-in pressure gauge at convenient eye level

Wide, welded frame and press table ensuring high flexibility

Ram-operated adjustment of table


Built-in safety overload valve

Removable ram end cap for mounting of various piston heads

Supplied with 2 vee blocks



P60EH1 / P60EH2

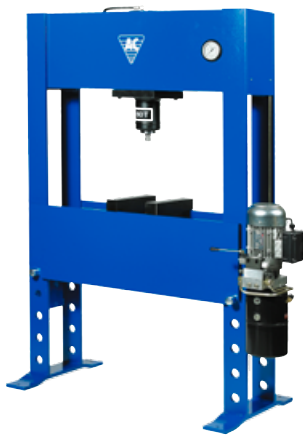

Capacity: 60 t
Stroke: 300 mm

Electro-hydraulic press for truck workshops and heavy industry

P60EH1: Single stage pump
Press speed: 4,2 mm/sec

P60EH2: 2-stage pump
Press speed: 10,0 mm/sec

The pressure can be set to any required tonnage up to 60 t

Traversing double-acting ram with long stroke of 300 mm

Built-in pressure gauge at convenient eye level

Ram-operated adjustment of table


Removable ram end cap for mounting of various piston heads

The motor is 3x400V and 50/60 Hz (can be switched for 3x230V)

Supplied with 2 vee blocks



| | P60H | P60EH1 | P60EH2 |
|--------------------|--------------|----------------------|----------------------|
| Capacity | 60 t | 60 t | 60 t |
| Stroke | 300 mm | 300 mm | 300 mm |
| Height | 1980 mm | 1980 mm | 1980 mm |
| Width | 1390 mm | 1555 mm ¹ | 1555 mm ¹ |
| Width between legs | 1010 mm | 1010 mm | 1010 mm |
| Depth between legs | 260 mm | 260 mm | 260 mm |
| Clearance | 170 - 770 mm | 170 - 770 mm | 170 - 770 mm |
| Press speed | | 4,2 mm/s | 10,0 mm/s |
| Return speed | | 5,9 mm/s | 14,5 mm/s |
| Weight | 625 kg | 630 kg | 635 kg |

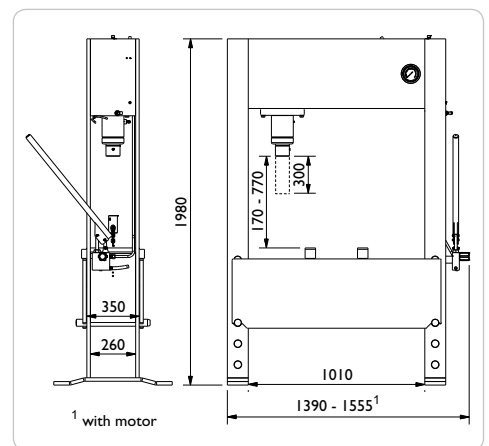



OPTION – PRESSES

PJW



Winch

Efficient and easy adjustment of press table

Fits:
PJ16H
PJ20H
PJ25H



PJS



Set of press tools

Press plate with 3 piston heads (Ø 12, 20, 30 mm and adaptor)

Fits:
PJ16H
PJ20H
PJ25H



PS



Set of press tools

Press plate with set of piston heads (Ø 10, 12, 15, 17, 20, 22, 25, 30 mm, adaptor and rack)

Fits:
P40H / P40EH1
P60H / P60EH1 / P60EH2
P100H / P100EH2



PS25 / PS40 / PS60 / PS100



Protection screen

Maximum operator safety

Steel mesh with shatterproof plexiglass

Protection screen with extreme high breakage point

Model Fits:
PS25 PJ16H, PJ20H, PJ25H
PS40 P40H, P40EH1
PS60 P60H, P60EH1, P60EH2
PS100 P100H, P100EH2





GEMCO Equipment Ltd
153 - 165 Bridge Street, Northampton, NN1 1QG
t: 01604 828600
e: sales@gemco.co.uk w: www.gemco.co.uk