



AC Hydraulic<sup>A/S</sup>  
NO COMPROMISE





# TRANSMISSION JACKS

## VL3 / VL6 / VL10



Capacity: 0,3 / 0,6 / 1,0 t  
Max. height: 1965 / 1965 / 2000 mm

### Hydraulic transmission jack

Pedal operated pump leaving both hands free for working  
Precise adjustment for positioning of transmission  
Hand operated dead man's release for optimum safety whilst lowering  
Galvanised support saddle and base frame  
Built-in safety overload valve  
Sturdy swivel castors for optimum stability and manoeuvrability  
Hard chromium plated piston rod and pump piston for long life  
Also suitable for many other lifting operations such as mounting of springs, fuel tanks, exhaust pipes etc.



## VLT12




Capacity: 1,2 t  
Max. height: 1920 mm

### Hydraulic transmission jack with telescopic cylinder

Especially for lifting heavy truck transmissions  
Ideal for workshop pits due to low minimum height and long stroke  
Pedal operated pump with built-in quick lift leaving both hands free for working  
Precise adjustment for positioning of transmission  
Hand operated dead man's release for optimum safety whilst lowering  
Galvanised support saddle and base frame  
Built-in safety overload valve  
Sturdy swivel castors (2 lockable) for optimum stability and manoeuvrability



	VL3	VL6	VL10	VLT12
Capacity	0,3 t	0,6 t	1,0 t	1,2 t
Min. height	1130 mm	1130 mm	1170 mm	905 mm
Max. height	1965 mm	1965 mm	2000 mm	1920 mm
Width	530 mm	530 mm	550 mm	720 mm
Weight	33 kg	33 kg	40 kg	65 kg
Wheel diameter	Ø 80 mm	Ø 80 mm	Ø 125 mm	Ø 125 mm

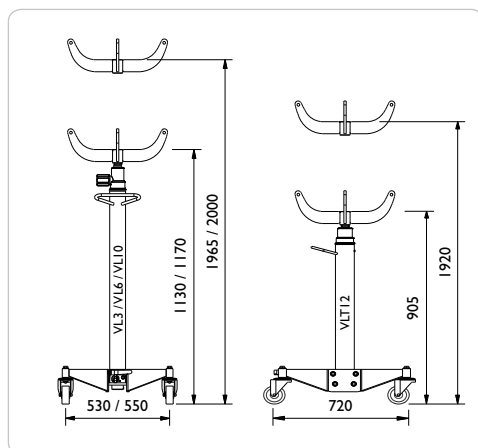



## OPTION - TRANSMISSION JACKS

### ASI



Capacity: 0,5 t  
Dimension: 352x307x118 mm

#### **Gearbox saddle for passenger vehicles**

10° tilt in all directions for precise dismounting and re-mounting of gearboxes

Fitted with 2 straps and 2 rubber cushions with magnets

Weight: 18 kg

Fits:  
All models



### AS3



Capacity: 1,0 t  
Dimension: 542x385x110 mm

#### **Commercial heavy duty gearbox saddle for passenger vehicles and trucks**

10° tilt in all directions for accurate dismounting and re-mounting of gearboxes

Low minimum height for wide range of applications

Fitted with 2 straps and 4 rubber cushions with magnets

Weight: 24 kg

Fits:  
VLI0 / VLT6 / VLT12



### UB15



Kapacitet: 15 l

#### **Universal bracket for liquid tub incl. tub**

Can be mounted on all Ø25-60 mm pistons

Allocated space for tools, screws and small parts

Special design allows oil filters to drain hands free

Hinged tilt function for easy emptying

Resistant to oil, acid and cooling liquid



### S / GSI



#### **Saddle**

Suitable for mounting springs, fuel tanks, exhaust pipes etc.

Fits:  
VL3 / VL6 /  
VLI0 / VLT12

#### **Rubber cushion**

To be used with the S-saddle for protection of car body

Fits:  
S







GEMCO Equipment Ltd  
 153 - 165 Bridge Street, Northampton, NN1 1QG  
 t: 01604 828600  
 e: sales@gemco.co.uk w: www.gemco.co.uk