

Application

- ☐ Repair and maintenance

Approvals

- ☐ Jaguar
- ☐ Landrover
- ☐ Opel
- ☐ Volkswagen Group



Biglift 2.50/55 Saav 145 Jumbo

Electro-hydraulic twin-ram lift, 5/5.5 t with superstructure with arms

Description:

Steel cassette:

- ☐ Waterproof steel cassette

Hydraulic unit:

- ☐ Hard-chrome plated cylinder
- ☐ Flexible synchronization and safety system
- ☐ Corrosion-free guiding elements
- ☐ Pump unit with immersed motor
- ☐ Ecological hydraulic fluid
- ☐ Pneumatic emergency lowering
- ☐ Programmable pushbutton control unit – great stability, even with uneven weight distribution; due to the cylinder diameter of 213 mm

Superstructure:

- ☐ Double telescopic arms, crosswise adjustable
- ☐ Internal arm locking system
- ☐ Low minimum height

Standard colours


- ☐ Base plate: Grey RAL 7016
- ☐ Arms: Red RAL 3020

Technical data

Lifting capacity	5,000 / 5,500 kg
Lifting height	1,865 mm
Working height	2,000 - 2,060 mm
Cylinder diameter	2 x 213 mm
Distance between cylinders	1,350 mm
Lifting / lowering time	app. 45 Sec.
Foundation depth	2,625 mm
Pump unit	3.0 kW
Ecological hydraulic fluid	18 l
Voltage	230/400 V - 50 Hz - 16 A

Arm superstructure

Total width	3,130 mm
Lifting pad included in the delivery	11028 (135 - 195 mm)
Min. height	135 - 195 mm
Arm length, min. - max.	715 - 1,410 mm

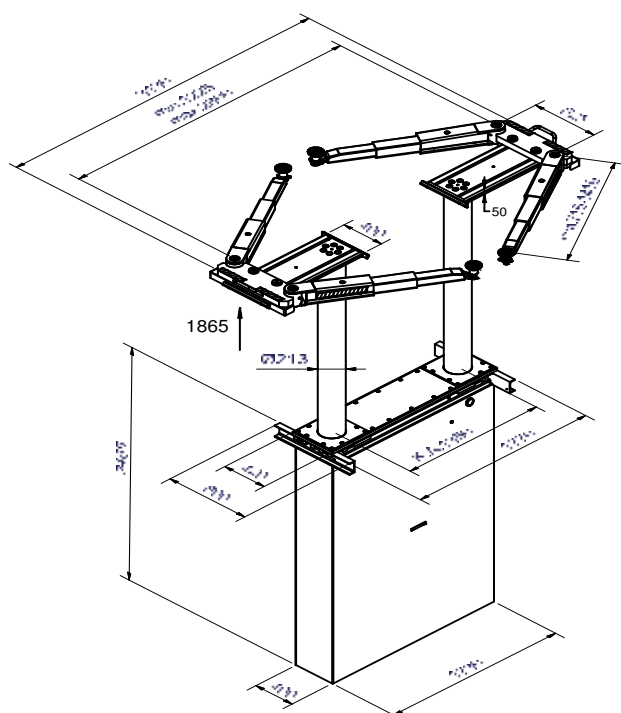

Scan the QR-Code for
detailed product information.

Further Information on
www.autopstenhoj.com

Versions:**Steel cassette:**

- ☐ Zinc-coated
- ☐ Coated
- ☐ Self-carrying

Installation:

- ☐ Superstructure on floor
- ☐ Ceiling installation

Optional extras:

- ☐ Large program of extra pads

**Special colours available
on request!**