


Application

- Repair and maintenance

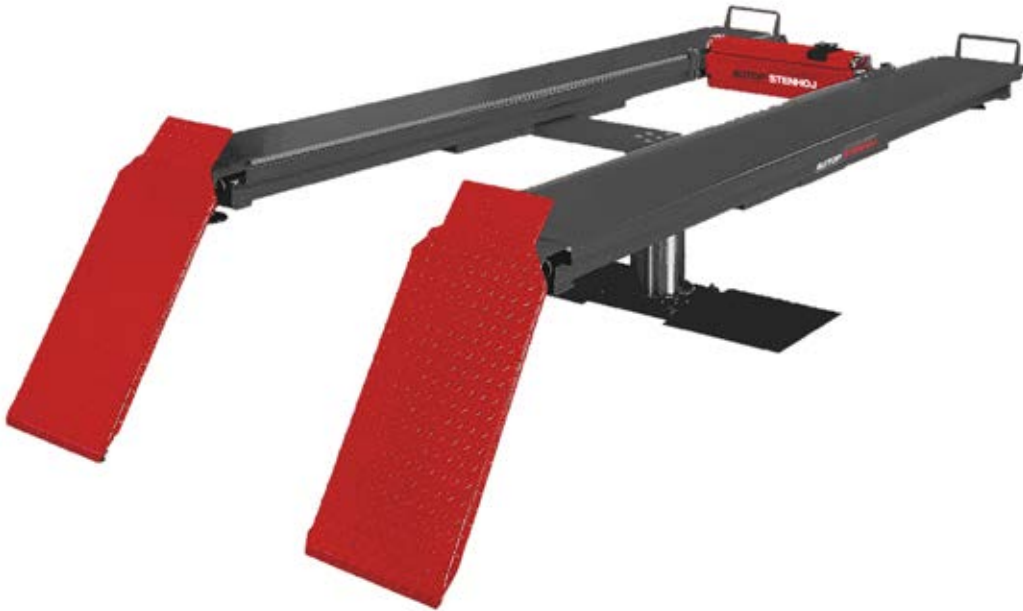

Mono Drive-On

High pressure and semi-hydraulic lifts, 3 t capacity

Description:


- Hard-chrome plated cylinder
- 4,180 mm flush platforms
- 900 mm drive-on ramps
- Semi-hydraulic with manouvering valve
- High pressure for either single or central operation (up to 6 lifts)
- Available with anti-rotation device
- Available with pilot valve

Standard colours

- Platforms: Grey RAL 7016
- Ramps: Red RAL 3020

Technical data	
Lifting capacity	3,000 kg
Lifting height	1,750 mm
Cylinder diameter	238 mm
Lifting / lowering time	35 Sec.
Foundation depth	2,600 mm
Ecological hydraulic fluid	High pressure: 8/40 l Semi-hydraulic: 140 l
Necessary constant air pressure	10 bar

Platforms	
Min. height	194 mm
Total width	variabel
Total length	5,086 mm
Platform length	4,180 mm
Usable length of platform	4,180 mm
Platform width	500 mm
Distance between platforms	902 mm
Wheel base	variable

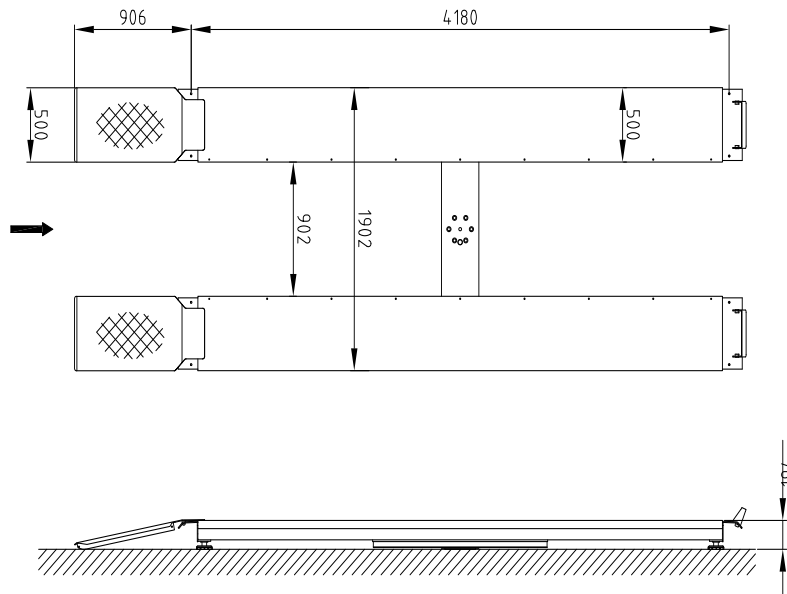

Scan the QR-Code for detailed product information.

Further Information on www.autopstenhoj.com

Versions:

- A = flush platforms
- Drive-on ramps and stops

Optional extras:

- Safety leg
- Installation frame
- Scissor jack
- Protection bag
- Set of two 1,300 mm drive-on ramps

Special colours available on request!