

Application

- Repair and maintenance



# Mono Quick 30

High pressure and semi-hydraulic lifts, 3 t capacity

## Description:


- Hard-chrome plated cylinder
- Adjustable H-shaped superstructure
- Skidproof Rubber pads
- Semi-hydraulic with manouvering valve
- High pressure for either single or central operation (up to 6 lifts)
- Available with anti-rotation device
- Available with pilot valve

## Standard colours

- Grey RAL 7016

Technical data	
Lifting capacity	3,000 kg
Lifting height	1,750 mm
Cylinder diameter	238 mm
Lifting / lowering time	35 Sec.
Foundation depth	2,600 mm
Ecological hydraulic fluid	High pressure: 8/40 l Semi-hydraulic: 140 l

Pv superstructure	
Min. height	79 mm
Total width	1,676 mm
Total length	1,836 mm

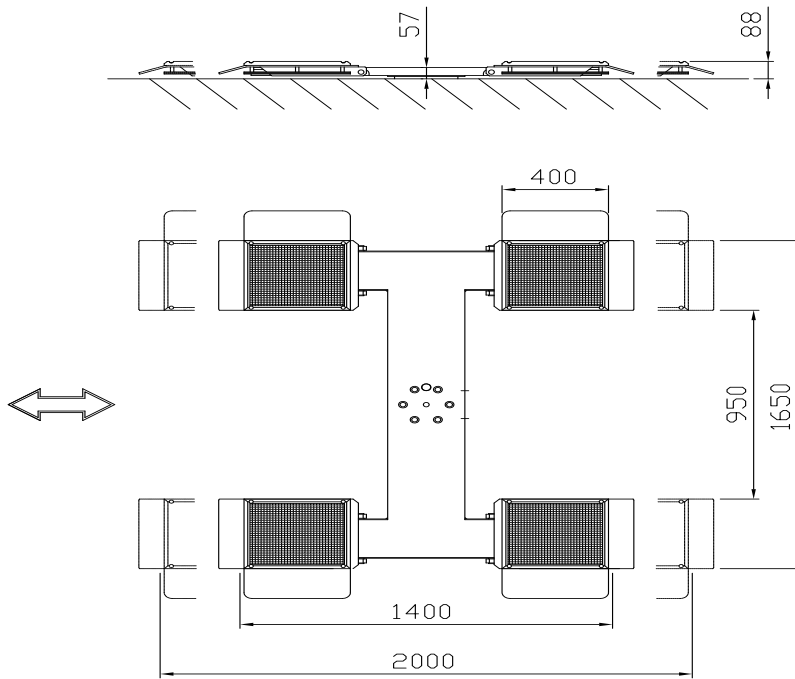

Scan the QR-Code for detailed product information.

Further Information on [www.autopstenhoj.com](http://www.autopstenhoj.com)

**Versions:**

- Superstructure 1,400-2,000 mm adjustability lengthwise

**Optional extras:**

- Safety leg
- Installation frame
- XY-pads
- Rubber pads

Special colours available on request!