

H7553ATL 5.5 tonne Class IV & VII ATL Hybrid Lift with 5600mm platforms

Product Description

The H7553ATL DVSA Approved 5.5 tonne Hybrid ATL Lift is suitable for workshops with limited space. This lift benefits from a platform alignment device, pressure relief valve and mechanical safety on each leg.

Key Features

- Mechanical safety on each leg
- Safety valve installed on each cylinder
- Pressure relief valve
- Platform alignment control device
- Hydraulic parachute device
- A new patented absorbing system prevents, through a special leverage and device for absorbing loads, any type of deformation, torque or mechanical stress on the platforms or uneven distribution of load on the lift
- 2 year warranty (subject to maintenance and terms & conditions – see www.gemco.co.uk)
- Free 1 year maintenance package included



Optional Extras

- Rear near slip plates
- MOT option
- ATL option
- Second scissor available
- GEMLIGHT 320 LED lighting kit

Technical Specifications	H7553ATL
Lifting capacity	5500kg
Lifting table capacity	4000kg
Platform length	5600mm
Lifting/Lowering time	70-80 seconds
Lifting height	2055mm
Minimum height	290mm
Electrical Supply - 3 Phase	3.5kW 230-400V/50Hz – 3ph
Operation	Hybrid
Pneumatic Feed	8 Bar


H7553ATLWL = As above with addition of rear slip plates

H7553ATLWL+ = As above with addition of rear slip plates and integral secondary lifting (4tonne capacity secondary)

GEMCO Sales & Service 153-165 Bridge St, Northampton, NN1 1QG



LinkedIn: GEMCO Sales & Service Facebook: GEMCO Sales & Service Twitter: @GemcoEquipment

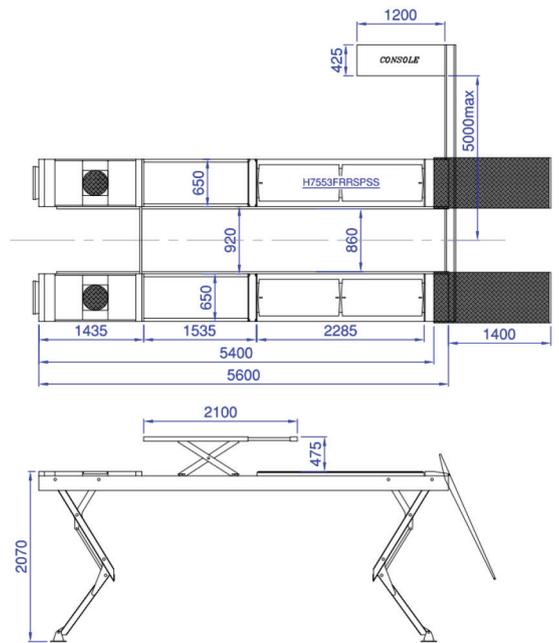

Specifications/Images subject to change without prior notice. E&OE Images are for illustration purposes only. To validate warranty, proof of a valid maintenance contract will be required.

