

H4403SL+ & H4403WL

Electro-hydraulic Four Post Lifts



*OPTIONAL JACKING BEAM PICTURED ABOVE NOT INCLUDED


| Technical Specifications | SERVICE | WHEEL ALIGNMENT |
|---|------------------------|------------------------|
| Model | H4403SL+ | H4403WL |
| Lifting capacity | 4000 kg | 4000 kg |
| Platform length | 4800mm | 4800mm |
| Minimum height (platform) | 126mm | 180mm |
| Maximum height (platform) | 1960mm | 1960mm |
| Drive through width | 2775mm | 2950mm |
| Lifting/Lowering time | 34 seconds | 34 seconds |
| Motor size | 3 Phase only - 2.6kw | 3 phase only - 2.6kw |
| Power requirements | 3 phase - 16a Isolator | 3 phase - 16a Isolator |
| Operation | Electro-hydraulic | Electro-hydraulic |
| Application | Service | Wheel Alignment |
| Rear Slip Plates | No | Yes |
| Recess for Turnplates | No | Yes |
| Turnplates Included | No | Yes |
| Surface Mounted Run On Ramps | Included (Pair) | Included (Pair) |
| Optional Jacking Beam (<i>not included</i>) | BJB15RDE | BJB15RDE |

H4403SL+ & H4403WL

Electro-hydraulic Four Post Lifts



H4403SL+

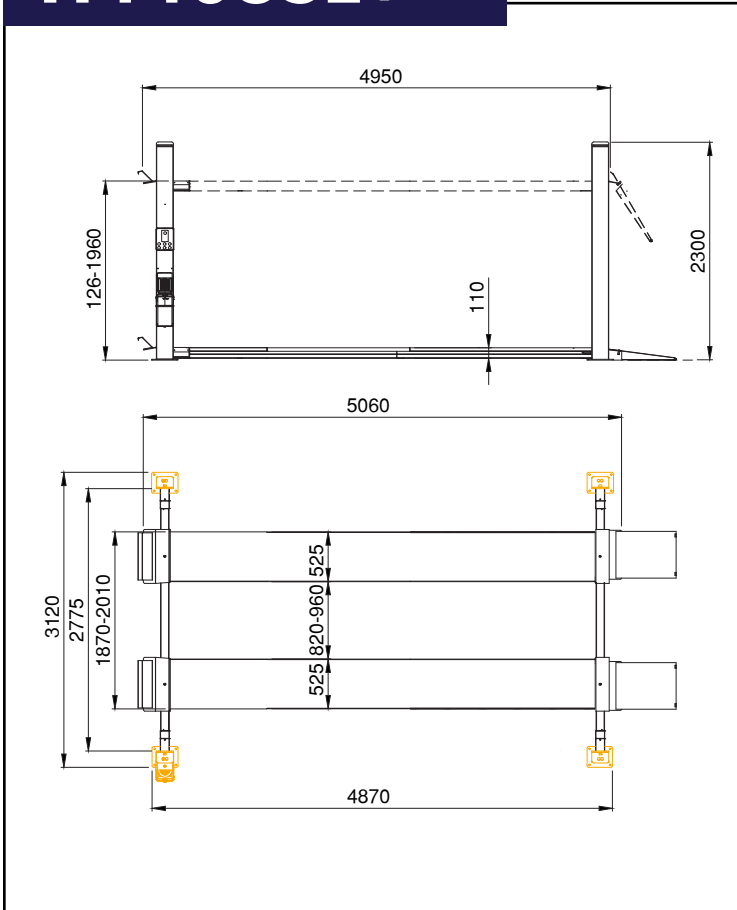

H4403WL

